

# CANTER 515 WIDE CAB PANTECH 4X2 / WIDE CAB / DUONIC DCT

GVM

**4,500KG**

GCM

**8,000KG**

Power/Torque

**110KW/370NM**

Can be driven on a passenger car licence.



**5**  
YEAR  
WARRANTY

FRP OR LIGHTWEIGHT HONEYCOMB BODY OPTIONS  
ESP AND CRUISE CONTROL STANDARD  
30,000KM SERVICE INTERVALS

fuso.com.au

**FUSO**

# SPECIFICATIONS

## MODEL

- A** 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFAN-B03)  
**B** 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFAN-B3A)

## WHEEL BASE

3400mm  
3400mm

## GVM


4500kg  
4500kg

## GCM

8000kg  
8000kg

### ENGINE

Engine Version	FUSO 4P10-T4 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Type	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Bore	95.8mm
Stroke	104mm
Power (DIN)	110kW @ 2840~3500 rpm
Torque (DIN)	370Nm @ 1350~2840 rpm
Maximum Engine Speed	4100 rpm
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled, 13.7L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9
Emission Level	ADR 80/03 & EEV rated (Enhanced Environmentally-Friendly Vehicle) Euro 5

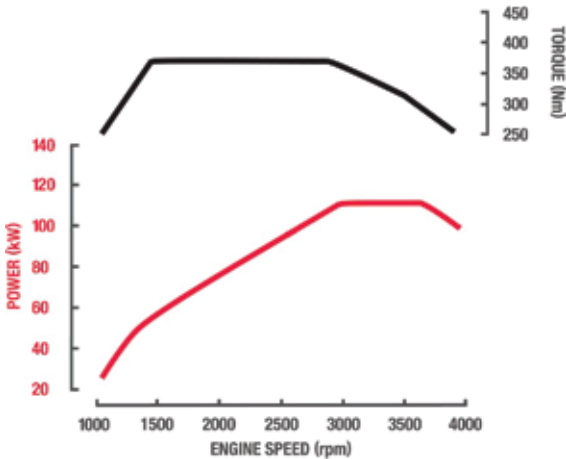

### FUEL

Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	100 Litres
Filtration	Filter with Water Separator and Indicator Sensor
Notes	*Max Fill to approx 95% of Air Capacity

### COOLING

Fan Drive	Thermo modulated continuous control (Viscous)
Radiator	Corrugated Fin with Expansion Tank

### ELECTRICAL

Voltage	12V Negative Earth
Alternator Capacity	12V-140 amp
Starter Capacity	12V-2.0kW
Battery Capacity	2x12V, 70Ah/5hr
Battery Specification	115D31LX2
Headlamp Type	Halogen
Headlamp Capacity	2x55W/60W

### CLUTCH

Clutch Model	Duonic Automated Manual (no clutch pedal)
Type	Dual Clutch (Wet Multi-plate)

### TRANSMISSION

Version	FUSO Duonic M038S6
Type/Speeds	6 Speed Dual Clutch with Auto and Manual Modes
Features	Virtually Instant Gear Changes In-Dash Gear Lever with Park Brake Position ECO Mode to Minimise Fuel Usage
Ratios	1st: 5.397 2nd: 3.788 3rd: 2.310 4th: 1.474 5th: 1.000 6th: 0.701 Rev. 5.397
PTO Opening	LH Side

### FRONT AXLE

Axle Version	FUSO F200T
Type	Independent Front Suspension
Capacity *	2300kg
Notes	*See MAX LOADING for vehicle capacity.

### FRONT SUSPENSION

Type	Double Wishbone Independent Front Suspension with Coil Springs and Shock Absorbers
------	------------------------------------------------------------------------------------

### REAR AXLE

Type	Full Floating Banjo Type
Axle Version	FUSO R030T
Capacity*	3800kg
Ratio	4.444:1
Notes	*See MAX LOADING for vehicle capacity.

### REAR SUSPENSION

Type	Steel Suspension
Details	Parabolic Leaf with Shock Absorbers
Size Main Leaves	1100x70mm

### MAX LOADING

Front	2180kg
Rear	3800kg
Total	4500kg

### STEERING

Type	Rack & Pinion
Steering Column	Tilt/Telescopic Adjustable
Power Assist	Standard

### BRAKES

Type	Hydraulic Dual Circuit with Front and Rear Discs Single Calliper Front and Rear
Size Front	276x28mm
Size Rear	276x28mm
Features	ABS plus EBD (Electronic Brake Distribution) Exhaust Brake Brake Priority System
Park Brake	Transmission Mounted

# SPECIFICATIONS

## MODEL

- A** 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFAN-B03)  
**B** 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFAN-B3A)

## WHEEL BASE

3400mm  
3400mm

## GVM

4500kg  
4500kg

## GCM

8000kg  
8000kg

### WHEELS & TYRES

Wheel Type	7 x Single Piece Disc Rims (Including Spare)
Wheel Size	16.0x5.5K-115
Wheel Stud Pattern	5 Stud 208 PCD
Tyre Size All	185/85R16 111/109
Spare Tyre Carrier	Provided

### CHASSIS

Type	Reinforced Tapered Channel
Size	188x60x4mm
Width	748mm
Tensile Strength	540Mpa

### INSTRUMENTS

Gauges	Speedometer with Odometer Tachometer Fuel Level Water Temperature
Colour Information Display	Fuel Consumption DPF Bar Chart from 1-9 Water Temperature Maintenance Reminder System Tripmeters

### MULTI-MEDIA PACKAGE

Satellite Navigation	Maps with heavy vehicle weight, length, height & hazardous material selectable restrictions with 3 years of Map updates
Colour Display	6.1 inch LCD with touch screen control
Phone Connectivity	Bluetooth® hands free
Audio Visual Entertainment	CD/DVD player and Digital radio DAB+ (also AM/FM for areas not covered by DAB+) USB port for iPod®* & other devices
Reversing Camera Compatible	1 Reverse Camera fitted as standard Display can accept up to 2 additional cameras#
Notes	* iPod® compatibility requires an additional licenced cable # Cameras available through spare parts

### STANDARD FEATURES

Airbag(s)	Dual Air Bags and Seat Belt Pre-Tensioners (Driver & Far Side Passenger)
Electronic Stability Program (ESP)	Yes
Idle Stop Start (ISS)	Yes
Cruise Control	Yes
Hill Start System	Yes
Cab Cooling & Heating	Air Conditioner / Heater / Demister
Accessory Power	12V Accessory Power Outlet / Cigar Lighter
Driving	Fuso Multimedia Unit Keyless Central Locking Electric Windows Cup Holders (2)
Storage	Dual Overhead Storage Pockets In-Dash Centre Document Storage Door Storage Pockets Dash Storage Tray (1 DIN) Coat Hooks
Cab: External	Front End-Outline Marker Lamps Door Side Impact Beams
Chassis	Reverse Warning Buzzer Factory Reverse Camera with Infrared Display and Audible Pickup

### CAB FEATURES

Type	All Steel Forward Control Manual Tilt
Cab Structure	ECE-R29 European Cab Strength Approved
Mounting	Hydroelastic 4 Point
Additional Engine Access	Removable Engine Access Panel
Colour	Natural White
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Rear Vision Mirrors	2 x External Convex (ECE 46) - Heated
Seating Capacity	3
Seat Belts	Lap Sash Belts for Outside Seating Positions Lap Belt for Centre Seat
Seat (driver)	Suspended with Weight Adjustment, LH Arm Rest and Lumbar Support
Seats (passenger)	Flat Folding, 2 Passenger Bench

### SERVICE INTERVALS

Interval*	30,000km or 12 Months (whichever occurs first)
Notes	* based on normal operating conditions and may be reduced when operating under severe conditions.

### WARRANTY

Basic/Powertrain	5 Years or 200,000kms (whichever occurs first)
Cab Perforation/Anti Corrosion	5 Years

### PERFORMANCE

Turning Circle (kerb to kerb - metres)	11.0
Road Speed (km/h) at Max Engine Speed	137
Engine Speed (rpm) at 100km/hr (top gear)	2346
Gradeability at Rated GVM (theoretical)*	45%
Notes	*This is theoretical performance only. Actual performance may vary under different conditions

### MASS (ESTIMATED)\*

Front*	<b>A</b> 1585kg	<b>B</b> TBA
Rear*	<b>A</b> 1885kg	<b>B</b> TBA
Total*	<b>A</b> 3470kg	<b>B</b> TBA
Notes	* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)	

### DIMENSIONS (MM)

Width Front Fender (mm)	1995
Width Rear Axle (mm)	1929
Width Rear Track (mm)	1495
Width Frame (mm)	748

# SPECIFICATIONS

## MODEL

- A** 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFAN-B03)  
**B** 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFAN-B3A)

## WHEEL BASE

3400mm  
 3400mm

## GVM

4500kg  
 4500kg


## GCM

8000kg  
 8000kg

### BUILT READY

Length (mm)	4320
Width (mm)	2185
Height (mm)	2135
Overall Unit Length (mm)	6335

Features	A	B
	<ul style="list-style-type: none"> <li>• 20mm White FRP Side and Wall Panels</li> <li>• One Piece Aluminum Roof Sheet</li> <li>• External Stainless Polished Extrusions</li> <li>• 3mm Steel Chequerplate Floor (Exposed Chequer Up)</li> <li>• 190mm High Internal Kick Panels</li> <li>• Internal Light with in cab switch</li> <li>• Internal Square Tube Tie Rails fixed to Panel Walls</li> <li>• Double Rear Doors with Three Hinges (kerb side opens first)</li> <li>• Fixed Grab Handles on Rear Pillars</li> <li>• Rear under-run bar to suit tailgate with steps and light protection frames</li> <li>• Tailgate: 600kg Capacity Dholandia Tuckaway Tailgate</li> </ul>	<ul style="list-style-type: none"> <li>• 20mm White Honeycomb Side and Wall Panels</li> <li>• One Piece Aluminum Roof Sheet</li> <li>• External Stainless Polished Extrusions</li> <li>• 3mm Steel Chequerplate Floor (Exposed Chequer Up)</li> <li>• 190mm High Internal Kick Panels</li> <li>• Internal Light with in cab switch</li> <li>• Internal Square Tube Tie Rails fixed to Panel Walls</li> <li>• Double Rear Doors with Three Hinges (kerb side opens first)</li> <li>• Fixed Grab Handles on Rear Pillars</li> <li>• Rear under-run bar to suit tailgate with steps and light protection frames</li> <li>• Tailgate: 600kg Capacity Dholandia Tuckaway Tailgate</li> </ul>

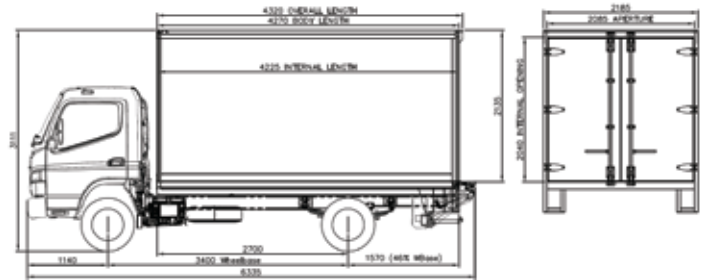

# FUSO

## CALL 1300 429 134

or visit [fuso.com.au](http://fuso.com.au)

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this document are for illustration purposes only and may not be available from Daimler Truck and Bus Australia Pacific Pty Ltd. (ABN 86 618 413 282) (DTB). No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTB. DTB reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTB please contact your authorised FUSO Truck and Bus dealer. Fuso is a registered trademark of Daimler Truck and Bus Australia Pacific Pty Ltd. Copyright DTB. Reproduction in whole or part prohibited without written approval. Part Number TSX30A-SSV1. Valid from 18-Sep-18.